

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG(19) Weltorganisation für geistiges Eigentum
Internationales Büro(43) Internationales Veröffentlichungsdatum
19. Februar 2004 (19.02.2004)

PCT

(10) Internationale Veröffentlichungsnummer
WO 2004/014562 A2(51) Internationale Patentklassifikation⁷: B03D 1/014,
1/012, 1/01

(21) Internationales Aktenzeichen: PCT/EP2003/007966

(22) Internationales Anmeldedatum:
22. Juli 2003 (22.07.2003)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:
102 35 574.6 3. August 2002 (03.08.2002) DE
102 52 451.3 12. November 2002 (12.11.2002) DE(71) Anmelder (für alle Bestimmungsstaaten mit Ausnahme von
US): CLARIANT GMBH [DE/DE]; Brüningstrasse 50,
65929 Frankfurt am Main (DE).

(72) Erfinder; und


(75) Erfinder/Anmelder (nur für US): RAU, Tobias [DE/DE];
An der Hechtsheimer Höhe 4c, 55130 Mainz (DE).
HESSE, Heinrich [DE/DE]; Mainzer Landstrasse 84,
65795 Hattersheim (DE). BUCH, Wolfgang [DE/DE];Merziger Weg 28, 60529 Frankfurt (DE). GOMEZ, Jaime
[CL/CL]; Santa Elena 221 Maipu, Santiago de Chile (CL).
AREND, Miguel, Angel [CL/CL]; Los Juncos 272
Las Condes, Santiago de Chile (CL). ERNSTORFER,
Norbert [CL/CL]; Benito Perez Galdos, 2093 La Reina,
Santiago de Chile (CL).(74) Anwalt: MIKULECKY, Klaus; Clariant Service GmbH,
Patente, Marken, Lizenzen, Am Unisys-Park 1, 65843
Sulzbach (DE).(81) Bestimmungsstaaten (national): AU, BR, CA, CN, MX,
PL, RU, US, ZA.(84) Bestimmungsstaaten (regional): europäisches Patent (AT,
BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR,
HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

Veröffentlicht:

— ohne internationalen Recherchenbericht und erneut zu ver-
öffentlichen nach Erhalt des BerichtsZur Erklärung der Zweibuchstaben-Codes und der anderen Ab-
kürzungen wird auf die Erklärungen ("Guidance Notes on Co-
des and Abbreviations") am Anfang jeder regulären Ausgabe der
PCT-Gazette verwiesen.

(54) Title: COLLECTING AGENT FOR SULPHIDIC ORES

(54) Bezeichnung: SAMMLER FÜR SULFIDISCHE ERZE

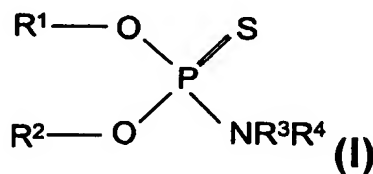(57) Abstract: The invention relates to a means for the flotation of sulphidic ores, comprising at least one compound of formula (I), where R¹, R² and R³ independently = alkyl groups with 1 to 18 carbon atoms, alkenyl groups with 2 to 18 carbon atoms, aryl groups with 6 to 10 carbon atoms or alkylaryl groups with 7 to 10 carbon atoms and a method for production thereof.(57) Zusammenfassung: Gegenstand der Erfindung ist somit ein Mittel zur Flotation von sulfidischen Erzen, enthaltend mindestens eine Verbindung der Formel (I) worin R¹, R² und R³ unabhängig voneinander für Alkylgruppen mit 1 bis 18 Kohlenstoffatomen, Alkenylgruppen mit 2 bis 18 Kohlenstoffatomen, Arylgruppen mit 6 bis 10 Kohlenstoffatomen oder Alkylarylgruppen mit 7 bis 10 Kohlenstoffatomen stehen, sowie ein Verfahren für dessen Herstellung.

WO 2004/014562 A2

523.544

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 February 2004 (12.02.2004)


PCT

(10) International Publication Number
WO 2004/013822 A1

- (51) International Patent Classification⁷: **G08B 13/12**
- (21) International Application Number:
PCT/IB2003/003432
- (22) International Filing Date: 17 July 2003 (17.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0217572.7 30 July 2002 (30.07.2002) GB
60/403120 13 August 2002 (13.08.2002) US
- (71) Applicant (for all designated States except US): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **DAVIDSON, Brian** [GB/GB]; 96 Bishops Wood, Goldsworth Park, Woking, Surrey GU21 3QD (GB).
- (74) Agent: **HIGGIN, Paul**; Swindell & Pearson, 48 Friar Gate, Derby DE1 1GY (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: A PORTABLE DEVICE FOR CONNECTION TO THE PERSON

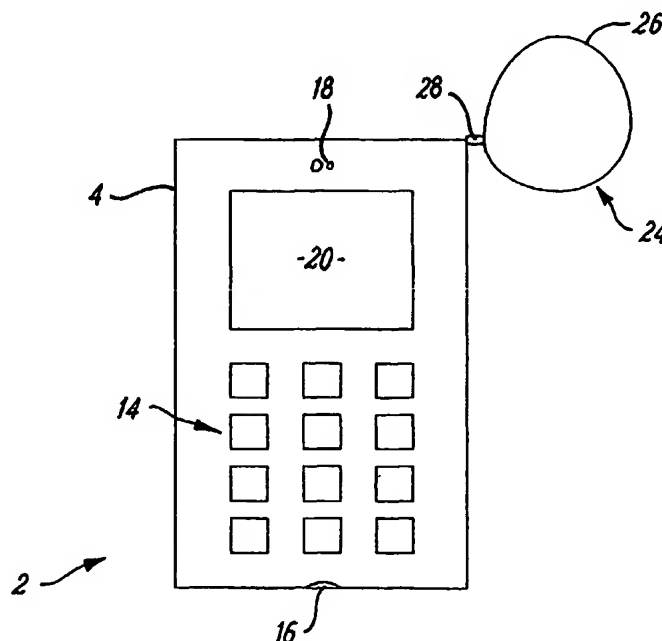

(57) Abstract: A portable device (2) comprising: unauthorized separation detection means arranged to detect the unauthorized separation of the portable device (2) from a person; and control means arranged to effect at least partial disablement of the portable device (2) in response to the unauthorized separation of the portable device (2) and person, wherein the unauthorized separation detection means are means for detecting the release of a releasable connector (24) connecting the portable device (2) to the person.

WO 2004/013822 A1



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

TITLE

A Portable Device for Connection to the Person

FIELD OF THE INVENTION

The present invention relates to portable devices for connection to the person. In particular, it seeks to reduce the desirability of such devices to thieves.

BACKGROUND TO THE INVENTION

The portable nature of mobile phones mean that they are easily misplaced and stolen. It would be desirable to make a telephone less desirable to a thief and, in particular, less likely to be stolen if misplaced or left behind.

A current trend in the mobile telephone industry, is the miniaturisation of telephones. Another trend is that mobile telephones are becoming fashion accessories and are often visibly worn on or about the person. For example, mobile telephones may be hung around the neck, around the wrist or attached to a belt or clothing. One problem with wearing telephones in this way is that they can be grabbed by a thief.

It would be desirable to reduce the likelihood of such a theft taking place and also to reduce the risk of personal injury during such a theft.

BRIEF SUMMARY OF THE INVENTION

According to one aspect of the present invention there is provided a portable device comprising: unauthorised separation detection means arranged to detect the unauthorised separation of the portable device from a counterpart; and control means arranged to effect at least partial disablement of one of the portable device and the counterpart in response to the unauthorised separation of the portable device and counterpart. The control means may be arranged to effect at least partial disablement of the use of a cellular radio transceiver housed in one of the portable device and the counterpart.

According to one embodiment, the counterpart is a person and the control means are arranged to effect at least partial disablement of the portable device (and the cellular radio transceiver housed therein). According to another embodiment the counterpart is

a counterpart device and the portable device and the counterpart device are arranged to form a couple between each other and the control means are arranged to effect at least partial disablement of the portable device (and the cellular radio transceiver housed therein). According to another embodiment, the counterpart is a counterpart device and the portable device and the counterpart device are arranged to form a couple between each other and the control means are arranged to effect at least partial disablement of the counterpart device (and the cellular radio transceiver housed therein).

According to another aspect of the invention there is provided a portable device having a radio transmitter, comprising: a releasable connector arranged to connect the portable device to a person and arranged to release the connection of the portable device to the person if the device is grabbed while connected to the person; and control means arranged to effect at least partial disablement of the device in response to the release of the releasable connector.

The partial disablement of the device results in the device not being capable of normal use but only being capable of restricted use or no use.

The releasable connector may be anything which allows the device to be worn by a person, for example, a neck strap, a wrist strap or a clip. With a neck strap the portable device is connected to a person by being supported around their neck. With a wrist strap the portable device is connected to a person by being attached to their wrist. With a clip the portable device is connected to a person by being attached to their clothing or accessories. The releasable attachment releases the connection by breaking, coming apart or otherwise losing the connection.

The portable device may comprise a sensor for sensing the release of the connector. The sensor may sense a change in electrical characteristics of the connector such as its resistance.

The portable device may be a mobile cellular telephone in which the radio transmitter is the transmitting portion of the telephone's radio transceiver. The partial disablement of the telephone results in the telephone not being capable of normal use. For example, the telephone may be capable of making only emergency calls and incapable of receiving calls (restricted use) or incapable of making and receiving any calls (no use). The partial disablement of the mobile cellular device may allow the device

to make calls to a network operator call centre and/or re-direct restricted calls to/from the device to a network operator call centre.

Preferably, the portable device can be re-enabled following authentication e.g. by the user calling the network operator call centre, possibly using the partially disabled mobile cellular device, and providing password authentication.

The portable device is preferably arranged to allow the operation of the releasable connector to be activated/deactivated. In the activated state, the control means is able to effect at least partial disablement of the device in response to the release of the releasable connector.

The control means is preferably arranged to control the radio transmitter to send a message in response to the release of the releasable connector.

In an embodiment where the device is or comprises a cellular mobile telephone for operation in a cellular communications network, the control means may be arranged to effect at least partial disablement of the device by controlling the radio transmitter to send a disabling message to the network for disabling normal operation of the telephone in the network. The mobile telephone may comprise a handset and a replaceable card, which enables the handset to operate as a telephone in the network, and the network may be responsive to the disabling message sent by the mobile telephone to disable the card from normal use in the network and/or to disable the handset from normal use in the network.

The disablement of the card will preferably involve an adaptation to one or more databases used in the network for controlling user access to the network. The disablement of the card may completely prevent the card from enabling the normal operation of any handset as a telephone in the network.

The disablement of the handset will preferably involve an adaptation to one or more databases used in the network for controlling equipment access to the network. The handset, even when disabled, may still be capable of making emergency calls e.g. to 911 (USA) or 999 (GB).

In an embodiment where the device is or comprises a cellular mobile telephone

for operation in a cellular communications network and the telephone comprises a handset and a replaceable card, which enables the handset to operate as a telephone in the network, the control means may be arranged to effect at least partial disablement of the device by locking the handset to the card, in response to the release of the releasable connector, so that it can be used normally as a telephone only in conjunction with the card present in the handset when the telephone is grabbed. If a different card is used with the handset after locking, the telephone may still be capable of making emergency calls e.g. to 911, but will not be capable of placing calls to user determined telephone numbers. Preferably, the control means, in response to the release of the releasable connector, is additionally arranged to send a disabling message to the network for disabling the card. The disablement of the card may completely prevent the card from enabling the normal operation of any handset as a telephone in the network.

According to another aspect of the invention there is provided a cellular mobile telephone, for operation in a cellular communications network, comprising: a releasable connector arranged to connect the mobile telephone to a person and arranged to release the connection of the mobile telephone to the person if the device is grabbed while connected to the person; and control means arranged to send a disabling message to the network in response to the release of the releasable connector.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention reference will now be made by way of example only to the accompanying drawings, in which:

Fig. 1 is a schematic illustration of the functional components of a GSM mobile telephone embodiment of the present invention;

Fig. 2 illustrates the exterior of the GSM telephone embodiment; and

Fig. 3 illustrates a GSM cellular communications network embodiment.

DETAILED DESCRIPTION OF EMBODIMENT(S) OF THE INVENTION

Fig. 1 is a schematic illustration of the functional components of cellular mobile telephone 2 for operation in a cellular communications network, which in this example is

a GSM network. The telephone 2 comprises a handset 4 and a SIM card 6. The handset 4 comprises a controller 10, radio transceiver circuitry 12 electrically connected to the controller 10, a user input keypad 14 electrically connected to the controller 10, a user input microphone 16 electrically connected to the controller 10, a loud speaker 18, for audio output to the user, electrically connected to the controller 10, and a display 20 electrically connected to the controller 10. These components are standard components of a GSM mobile telephone handset. The person skilled in the art will readily understand how they inter-operate to send and receive messages such as SMS messages and to make and receive telephone calls. The handset 4, further comprises, a sensor 22 electrically connected to the controller 10 and a connector 24 connected to the sensor 22.

Fig. 2 schematically illustrates the exterior of the handset 4. In this embodiment, the connector 24 comprises a strap 26 and a couple 28. The strap 26 is connected to the body of the handset 4 via the couple 28. The strap 26 may be suitable for being passed over the head of a user so that the handset 4 hangs from the neck or it may be suitable for being passed over the hand and tightened around the wrist so that the handset 4 hangs from the wrist. Although a strap 26 is illustrated in this figure, it should be appreciated that different connectors 24 could be used. For example, the connector 24 could in an alternative embodiment be a clip for attaching the handset 4 to a belt or to clothing.

The connector 24 which connects the telephone to a person is designed so that it will release the connection when the telephone 2, attached to a person, is grabbed by a thief. For example, in the embodiment of Fig. 2 the strap 26 may have an inherent weakness so that when the telephone 2 is grabbed the strap breaks. Alternatively, the couple 28 may be designed to sever the connection between the strap 26 and the telephone 2 when the telephone is grabbed by a thief. The sensor 22, illustrated in Fig. 1, is arranged to sense when the telephone 2, which is attached to a person, has been grabbed by a thief. This is preferably done by sensing when the connector 24 ceases to connect the telephone 2 to the person. This may be achieved by, for example, forming a closed conductive path from the telephone 2 through the couple 28 and around the strap 26 to return to the telephone 2 while the telephone 2 is attached to the person. The severance of this closed conductive path, when the connector releases its connection, is easily detectable using known techniques such as by periodically testing the conductive path for changes in resistance.

Alternatively, the sensor 22 may not be physically connected to the connector 24. Instead, the sensor 22 comprises a low power radio transceiver or infrared transmitter for communicating with a counterpart device carried by the person. The low power radio transceiver in the sensor 22 may for example communicate with a low power radio transceiver in the wrist watch of the user of the phone. When the link between the telephone 2 and the counterpart device is broken because the telephone and counterpart device have been separated the sensor 22 is activated. The sensor 22 is therefore acting as a proximity detector and is activated when the telephone 2 and the counterpart device are separated beyond the threshold distance. A separation beyond the threshold distance would occur, for example, if the telephone 2 were stolen by a thief or inadvertently left behind. In this alternative embodiment, the activation of the sensor causes the controller 10 to at least partially disable the telephone 2. This may occur, for example, by the radio transceiver 12 of the mobile telephone transmitting a disable message and/or, by the locking of the SIM card 6 to the handset 4. As a variation, to this alternative embodiment, the sensor 22 may be positioned in the counterpart as opposed to the telephone 2. The controller 10 is connected to a low power radio frequency transceiver which communicates with a low power radio frequency transceiver connected to the sensor 22 in the counterpart. The sensor 22 operates as a proximity detector, detecting when the separation between the counterpart and the telephone exceeds a threshold. This may be done by, for example, measuring the attenuation of a signal. When the separation exceeds the threshold, the sensor 22 in the counterpart is activated and sends a command to the controller 10 which causes the at least partial disablement of the mobile telephone 2.

In response to the activation of the sensor 22 the controller 10 when in an active mode effects at least a partial disablement of the telephone 2. This disablement may be achieved in a number of different ways. However, when the controller is in an inactive mode it does not respond to activation of the sensor. The user can select whether the controller 10 is in the active or inactive mode.

According to a preferred embodiment, the controller 10 controls the radio transceiver 12 to send a disabling message which will substantially prevent the telephone 2 being used as a normal telephone. The telephone 2 may be completely prevented from operating in the cellular network or it may for example, be capable of only performing a very limited number of functions for example making emergency calls

only, or calling only a network operator call centre.

Figure 3 illustrates a GSM cellular network 40 comprising a plurality of cells 42 each with a base station 44. The mobile telephone 2 communicates in the network by transmitting to and receiving from the serving base station 44 of the cell 42 in which it is located. As the mobile station moves from one cell to another the serving base station 44 changes. The base stations 44 are controlled by a mobile switching centre (MSC) 46. The MSC 46 controls the routing of communications from sender to receiver. The MSC 46 is connected to the Home Location Register (HLR) 48. This is a central database storing all the information that allows a user to access and use the network 40. The HLR 48 stores the International Mobile Subscriber Identity (IMSI) for each user of the network 40 and a restriction class for each user which indicates whether a user is able to transmit and receive communications and the type of communications that are possible. The network 40 may also have an Equipment Identity Register (EIR) 50 connected to the MSC 46. The EIR 50 is a database which tracks handsets. The EIR, if present, may blacklist a stolen handset via its International Mobile Equipment Identity (IMEI) thereby preventing its use in the network 40.

In response to activation of the sensor 22, the controller 10 controls the radio transceiver 12 to send a disabling SMS message which will substantially prevent the telephone 2 being used as a normal telephone. The message may be sent immediately, or when the phone is next activated. The phone may self-activate in response to activation of the sensor. The message sent to the network may include the International mobile subscriber identity (IMSI) stored in the SIM 6 and the International mobile equipment identity (IMEI) stored in the handset 2. The IMSI uniquely identifies the user in the network and the IMEI uniquely identifies the handset. Alternatively, if the telephone is already participating in the network and has a temporary mobile subscriber identity (TMSI), the message may include the TMSI. The network is therefore capable, having received the message, of uniquely identifying the handset 4 and the SIM card 6 either directly from the IMEI and IMSI or indirectly via the TMSI. The network is then able to change the restriction class in the HLR 48 for that IMSI and is capable of registering the handset having that IMEI as stolen in the EIR 40. Thus the handset will not be capable of being used, except possibly to make emergency calls to 911/999 or calls to the network operator call centre and the SIM card will not be capable of being used in another telephone. Preferably, the disabled telephone can be re-enabled by the network operator, after receiving a password during a call, possibly placed using the

partially disabled telephone, to the network operator call centre.

According to another embodiment of the invention, the controller 10 responds to the sensor 22 sensing that the connector 24 has been released, by locking the handset 4 to the particular SIM card 6 which is connected to it at that time. This locking procedure is described in the SIM personalisation procedure described in GSM 02.22 and in EP-B-0301740. The controller 10 may also control the radio transmitter 12 to send a disabling SMS message to the network 40. This disabling message may be the same and operate in the same manner as described in the preceding paragraph. Alternatively, if the EIR 50 is not present in the network 40, the message may change the restriction class in the HLR 48 for that IMSI. The locking procedure may be reversed by entering a secret PIN code to the telephone or remotely by the network operator after receiving a password. The effect of the disable message may be reversed by the network operator after receiving a password as described in the preceding paragraph.

Although the preceding paragraphs have described an embodiment of the invention with reference to a GSM cellular communication network and a GSM compliant *mobile telephone*, it should be appreciated that the invention has application in other cellular communication networks and telephones, and in other appliances with radio transmitters. It should therefore be appreciated that modifications and variations to the examples given can be made without departing from the scope of the invention as claimed.

Whilst endeavouring in the foregoing specification to draw attention to those features of the invention believed to be of particular importance it should be understood that the Applicant claims protection in respect of any patentable feature or combination of features hereinbefore referred to and/or shown in the drawings whether or not particular emphasis has been placed thereon.

I/we claim:

CLAIMS

1. A portable device comprising:

unauthorized separation detection means arranged to detect the unauthorized separation of the portable device from a person; and

control means arranged to effect at least partial disablement of the portable device in response to the unauthorized separation of the portable device and person, wherein the unauthorized separation detection means are means for detecting the release of a releasable connector connecting the portable device to the person.

2. A portable device as claimed in claim 1, wherein the releasable connector comprises a strap.

3. A portable device as claimed in claim 1 or 2, wherein the releasable connector is released by severance.

4. A portable device as claimed in any one of claims 1 to 3, wherein the unauthorized separation detection means detects the interruption of a closed conductive path via the releasable connector.

5. A portable device as claimed in any one of claims 1 to 5, wherein the portable device comprises a cellular radio transceiver.

6. A portable device as claimed in claim 5, wherein the control means is arranged to effect at least partial disablement of the portable device by controlling the cellular radio transceiver to transmit a disable message.

7. A portable device as claimed in any preceding claim, wherein the portable device is or comprises a cellular mobile telephone for operation in a cellular communications network and the control means is arranged to effect at least partial disablement of the portable device by sending a disabling message to the network for disabling normal operation of the telephone in the network.

8. A cellular telephone network comprising a portable device as claimed in claim 7 wherein the mobile telephone comprises a handset and a replaceable card, which enables the handset to operate as a telephone in the network, and the network is

responsive to the disabling message sent by the mobile telephone to disable the card from normal use in the network and/or to disable the handset from normal use in the network.

9. A portable device having a radio transmitter, comprising:

a releasable connector arranged to connect the portable device to a person and arranged to release the connection of the portable device to the person if the device is grabbed while connected to the person; and

control means arranged to effect at least partial disablement of the portable device in response to the release of the releasable connector.

10. A portable device as claimed in claim 9, wherein the releasable connector comprises a strap.

11. A portable device as claimed in claim 9 or 10, wherein the releasable connector is released by severance.

12. A portable device as claimed in any one of claims 9 to 11, wherein the unauthorized separation detection means detects the interruption of a closed conductive path via the releasable connector.

13. A portable device as claimed in any one of claims 9 to 12, wherein the control means is arranged to control the radio transmitter to send a message in response to the release of the releasable connector.

14. A portable device as claimed in any one of claims 9 to 12, wherein the device is or comprises a cellular mobile telephone for operation in a cellular communications network and the control means is arranged to control the radio transmitter to send a disabling message to the network for disabling normal operation of the telephone in the network.

15. A cellular telephone network comprising a portable device as claimed in claim 14 wherein the mobile telephone comprises a handset and a replaceable card, which enables the handset to operate as a telephone in the network, and the network is responsive to the disabling message sent by the mobile telephone to disable the card from normal use in the network and/or to disable the handset from normal use in the

network.

16. A device as claimed in claim 15 wherein the device is or comprises a cellular mobile telephone for operation in a cellular communications network and the telephone comprises a handset and a replaceable card, which enables the handset to operate as a telephone in the network, wherein the control means is arranged to lock the handset to the card, in response to the release of the releasable connector, so that the handset can be used normally as a telephone only in conjunction with the card which is present in the handset when the telephone is grabbed.

17. A device as claimed in claim 16 wherein the control means is additionally arranged to send a disabling message to the network for disabling the card so that it can no longer enable a handset to operate normally as a telephone in the network.

18. A cellular telephone network comprising a device as claimed in claim 17 wherein the network is responsive to the disabling message sent by the mobile telephone to disable the card from normal use in the network.

19. A cellular mobile telephone, for operation in a cellular communications network, comprising:

a releasable connector arranged to connect the mobile telephone to a person and arranged to release the connection of the mobile telephone to the person if the device is grabbed while connected to the person; and

control means arranged to send a disabling message to the network in response to the release of the releasable connector.

20. A cellular telephone network comprising a mobile telephone as claimed in claim 19 wherein the mobile telephone comprises a handset and a replaceable card, which enables the handset to operate as a telephone in the network, and the network is responsive to the disabling message sent by the mobile telephone to disable the card from normal use in the network and/or to disable the handset from normal use in the network.

21. A cellular mobile telephone comprising a mobile telephone as claimed in claim 19 comprising a handset and a replaceable card, which enables the handset to operate as a telephone in the network, wherein the control means is arranged to lock the handset to

the card, in response to the release of the releasable connector, so that the handset can be used normally as a telephone only in conjunction with the card which is present in the handset when the telephone is grabbed.

22. A cellular telephone network comprising a mobile telephone as claimed in claim 21 wherein the network is responsive to the disabling message sent by the mobile telephone to disable the card from normal use in the network.

23. A portable device comprising:

unauthorized separation detection means arranged to detect the unauthorized separation of the portable device from a counterpart device worn by a person; and

control means arranged to effect at least partial disablement of the portable device in response to the unauthorized separation of the portable device and counterpart, wherein the portable device and the counterpart device are arranged to form a wireless couple, the diminution of which is detectable by the unauthorized separation detection means.

24. A portable device as claimed in claim 23, wherein the portable device comprises a cellular radio transceiver.

25. A portable device as claimed in claim 24, wherein the control means is arranged to effect at least partial disablement of the portable device by controlling the cellular radio transceiver to transmit a disable message.

26. A portable device as claimed in claim 23 wherein the portable device is or comprises a cellular mobile telephone for operation in a cellular communications network and the control means is arranged to effect at least partial disablement of the portable device by sending a disabling message to the network for disabling normal operation of the telephone in the network.

27. A cellular telephone network comprising a portable device as claimed in claim 26, wherein the mobile telephone comprises a handset and a replaceable card, which enables the handset to operate as a telephone in the network, and the network is responsive to the disabling message sent by the mobile telephone to disable the card from normal use in the network and/or to disable the handset from normal use in the network.

28. A portable device wearable by a person comprising:

unauthorized separation detection means arranged to detect the unauthorized separation of the portable device from a counterpart device; and

control means arranged to effect at least partial disablement of the counterpart device in response to the unauthorized separation of the portable device and counterpart, wherein the portable device and the counterpart device are arranged to form a wireless couple, the diminution of which is detectable by the unauthorized separation detection means.

29. A portable device as claimed in claim 28, wherein the counterpart device comprises a cellular radio transceiver or mobile telephone.

30. A portable device comprising:

unauthorized separation detection means arranged to detect the unauthorized separation of the portable device from a counterpart; and

control means arranged to effect at least partial disablement of one of the portable device and the counterpart in response to the unauthorized separation of the portable device and counterpart, wherein the portable device is or comprises a cellular mobile telephone for operation in a cellular communications network and the control means is arranged to effect at least partial disablement of the portable device by sending a disabling message to the network for disabling normal operation of the telephone in the network.

31. A cellular telephone network comprising a portable device as claimed in claim 30 wherein the mobile telephone comprises a handset and a replaceable card, which enables the handset to operate as a telephone in the network, and the network is responsive to the disabling message sent by the mobile telephone to disable the card from normal use in the network and/or to disable the handset from normal use in the network.

32. A portable device comprising:

unauthorized separation detection means arranged to detect the unauthorized separation of the portable device from a counterpart; and

control means arranged to effect at least partial disablement of one of the portable device and the counterpart in response to the unauthorized separation of the

portable device and counterpart, wherein the device is or comprises a cellular mobile telephone for operation in a cellular communications network and the telephone comprises a handset and a replaceable card, which enables the handset to operate as a telephone in the network, wherein the control means is arranged to effect at least partial disablement of the portable device by locking the handset to the card so that the handset can be used normally as a telephone only in conjunction with the card which is present in the handset at the time of locking.

33. A portable device substantially as hereinbefore described with reference to and/or as shown in the Figures.

34. A mobile telephone substantially as hereinbefore described with reference to and/or as shown in the Figures.

35. A cellular radio communications network substantially as hereinbefore described with reference to and/or as shown in the Figures.

36. A portable device having a radio transmitter, comprising:

 unauthorized removal means arranged to detect the unauthorized removal of the device from a person porting the device; and

 control means arranged to effect at least partial disablement of the device in response to the unauthorized removal of the device.

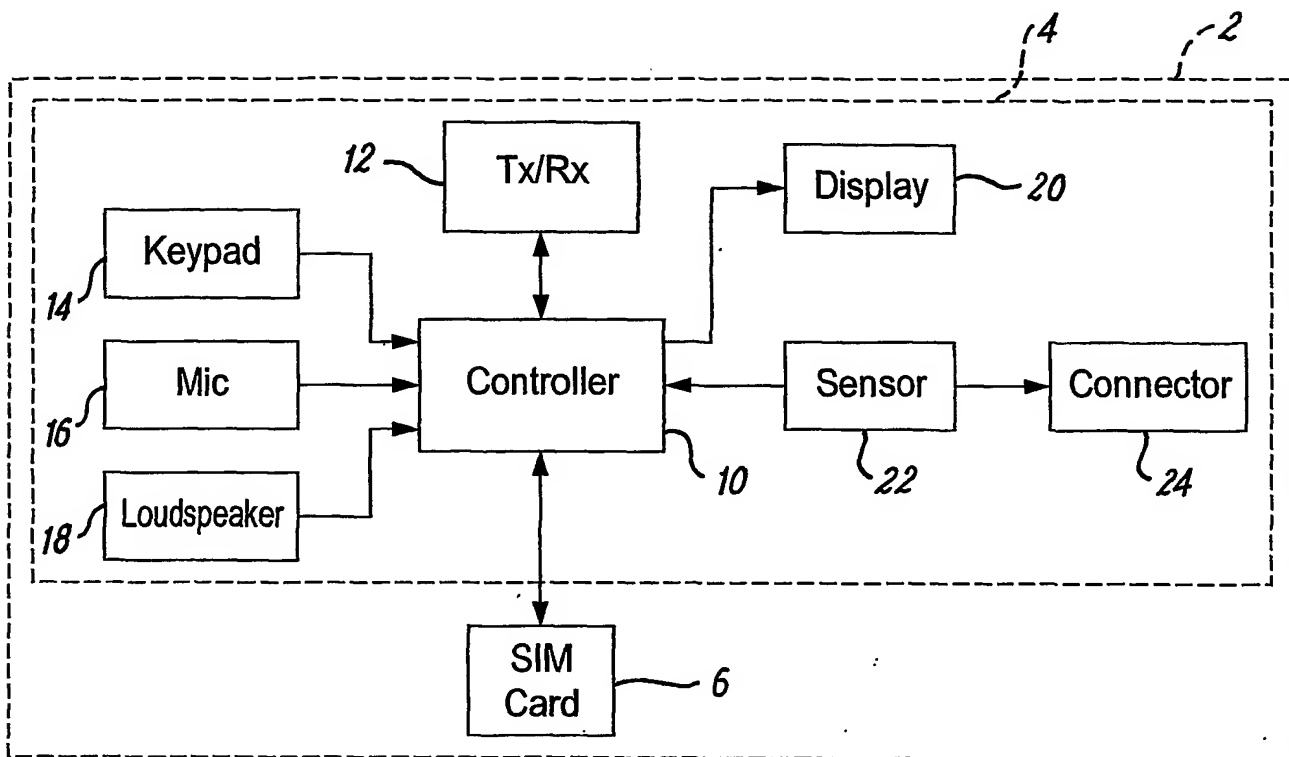


FIG. 1

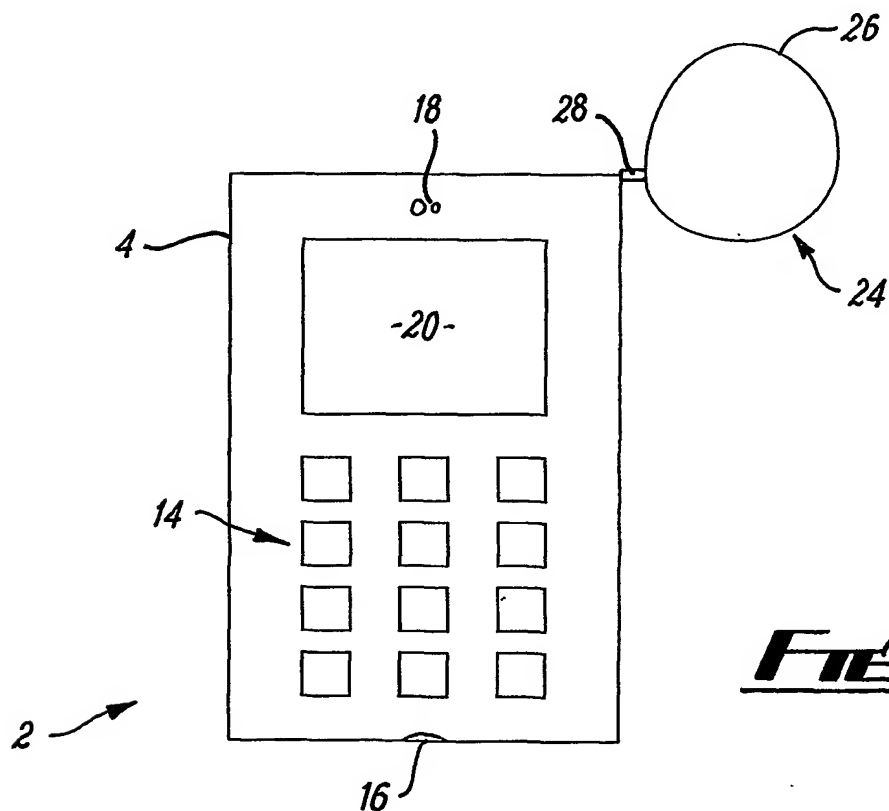


FIG. 2

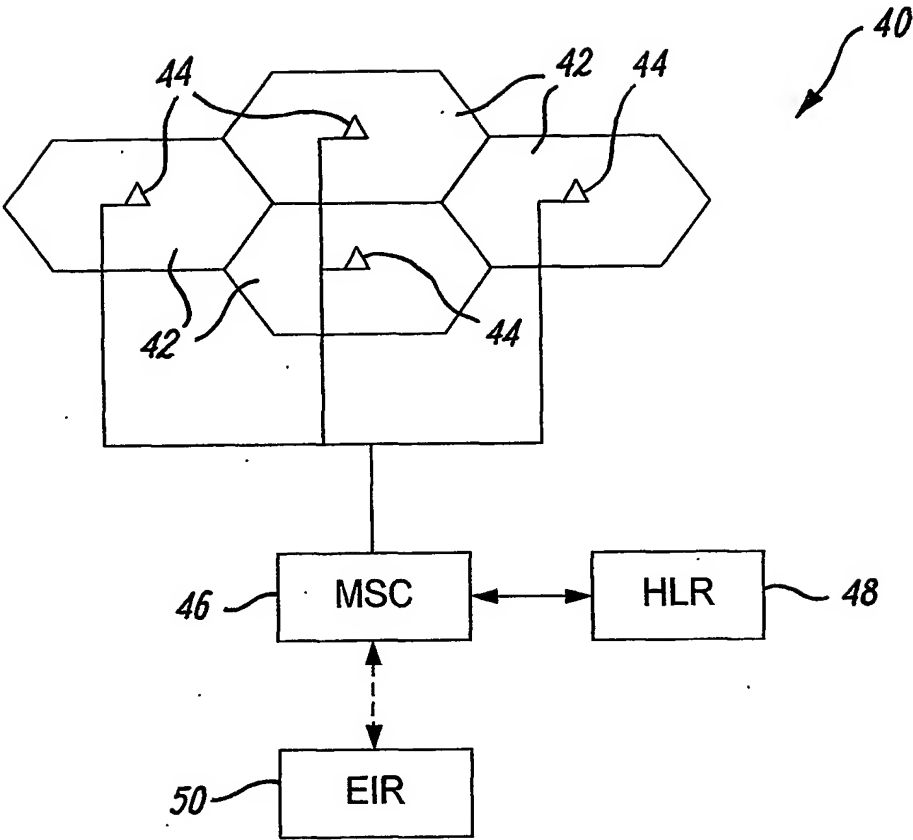


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 03/03432

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: G08B 13/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: G08B, H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6151493 A (SASAKURA, T. ET AL), 21 November 2000 (21.11.00), column 1, line 64 - column 2, line 24; column 9, line 45 - line 51	23-24, 28-29
A	--	1-14, 25-26, 33-34
A	DE 20112099 U1 (MAYR, R. ET AL), 22 November 2001 (22.11.01), whole document	23-24, 28-29
P,X	FR 2830108 A1 (RIBLET, R.), 28 March 2003 (28.03.03), figures 1-2, abstract	1-5, 9-12, 33-34, 36
	--	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

27 November 2003

05-12-2003

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Anna Lundqvist / ITW
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No. .

PCT/IB 03/03432

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO 03048907 A2 (AVGANIM, M.), 12 June 2003 (12.06.03), figure 1, abstract -----	1-5,9-12, 33-34,36

INTERNATIONAL SEARCH REPORT
 Information on patent family members

06/09/03

International application No.

PCT/IB 03/03432

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	6151493	A	21/11/00	JP 2931276 B	09/08/99
				JP 11088499 A	30/03/99
DE	20112099	U1	22/11/01	NONE	
FR	2830108	A1	28/03/03	NONE	
WO	03048907	A2	12/06/03	IL 146897 D	00/00/00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IB03/03452**Box I** Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see extra sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
1-14, 23-26, 28-29, 33-34, 36

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
☐ No protest accompanied the payment of additional search fees.

The separate inventions are:

Invention 1: Claims 1-14, 23-26, 28-29, 33-34 and 36 relate to a portable device comprising unauthorized separation detection means and means to detect the release of a releasable connector connecting the portable device to a person.

Invention 2: Claims 15-22, 27, 30-32 and 35 relate to a cellular telephone network comprising a mobile telephone comprising a handset and a replaceable card sending disabling messages to the network.

The problem solved by invention 1 is to prevent theft and unauthorized use of the portable device.

The problem solved by invention 2 is to send a disabling message to a network for disabling normal operation of the telephone in the network.

These inventions are not so linked as to form a single general inventive concept (PCT Rule 13.1). There is no technical relationship among the inventions involving a corresponding special technical feature (PCT Rule 13.2).